


REMOVAL

1. REMOVE FRONT WHEELS

Torque: 110 N·m (1,150 kgf·cm, 83 ft·lbf)

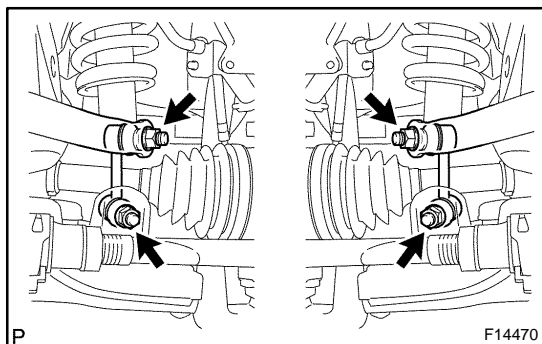

2. REMOVE STABILIZER BAR LINKS


- (a) Remove the 2 nuts and stabilizer bar link from the lower suspension arm and stabilizer.

Torque: 90 N·m (920 kgf·cm, 66 ft·lbf)

HINT:

If the ball joint stud turns together with the nut, use a hexagon wrench to hold the stud.

- (b) Employ the same manner described above to the other side.

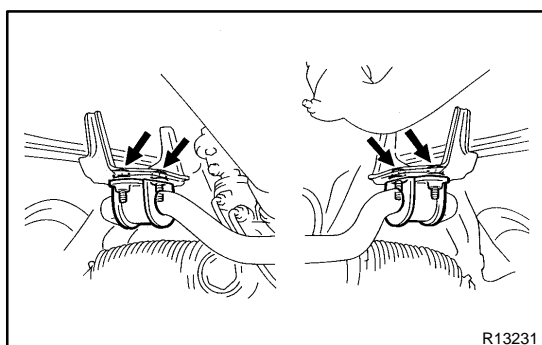

3. REMOVE STABILIZER BAR

- (a) Remove the 4 bracket set bolts and stabilizer bar with the cushions and brackets.

Torque: 25 N·m (260 kgf·cm, 19 ft·lbf)

- (b) Remove the 2 brackets and cushions from the stabilizer bar.